


GENERAL NOTES

- INSTALL ALL HORIZONTAL REFRIGERANT LINE SET HIGH AND TIGHT TO THE STRUCTURE ABOVE OR UP WITHIN THE
 JOIST SPACE, ALL VERTICAL REFRIGERANT LINE SET INSTALLED WITHIN WALL FRAMING OR IN CHASES. SEE DETAIL
 SHEET FOR SIZES.
- 2. INSTALL ALL EQUIPMENT IN ACCORDANCE WITH MFGR'S INSTRUCTIONS.
- 3. PROVIDE ACCESS DOORS AS REQ'D IN ALL HARD CEILING FOR ROUTINE MAINTENANCE OF ALL COMPONENTS OF THE SYSTEM.



KEYED NOTES

- 1. OFFSET AND ROUTE REFRIGERANT PIPING UP IN WALL FRAMING FROM BELOW TO SERVE THE 2ND LEVEL, (BASE BID).
- 2. INSTALL REFRIGERANT PIPING UP IN WALL FRAMING FROM BELOW TO SERVE THE BASEMENT AND CONTINUE UP TO SERVE THE 1ST LEVEL.
- 3. FIELD VERIFY MFGR'S ACCESS INTO ALL COMPONENTS OF THE SYSTEM IN THE CEILING SPACE PRIOR TO

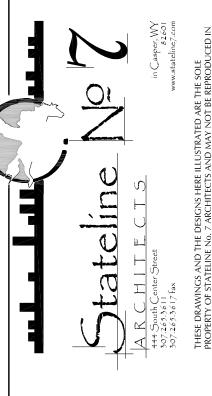



PHASE 1 BASEMENT FLOOR PLAN -HYDRONIC PIPING