




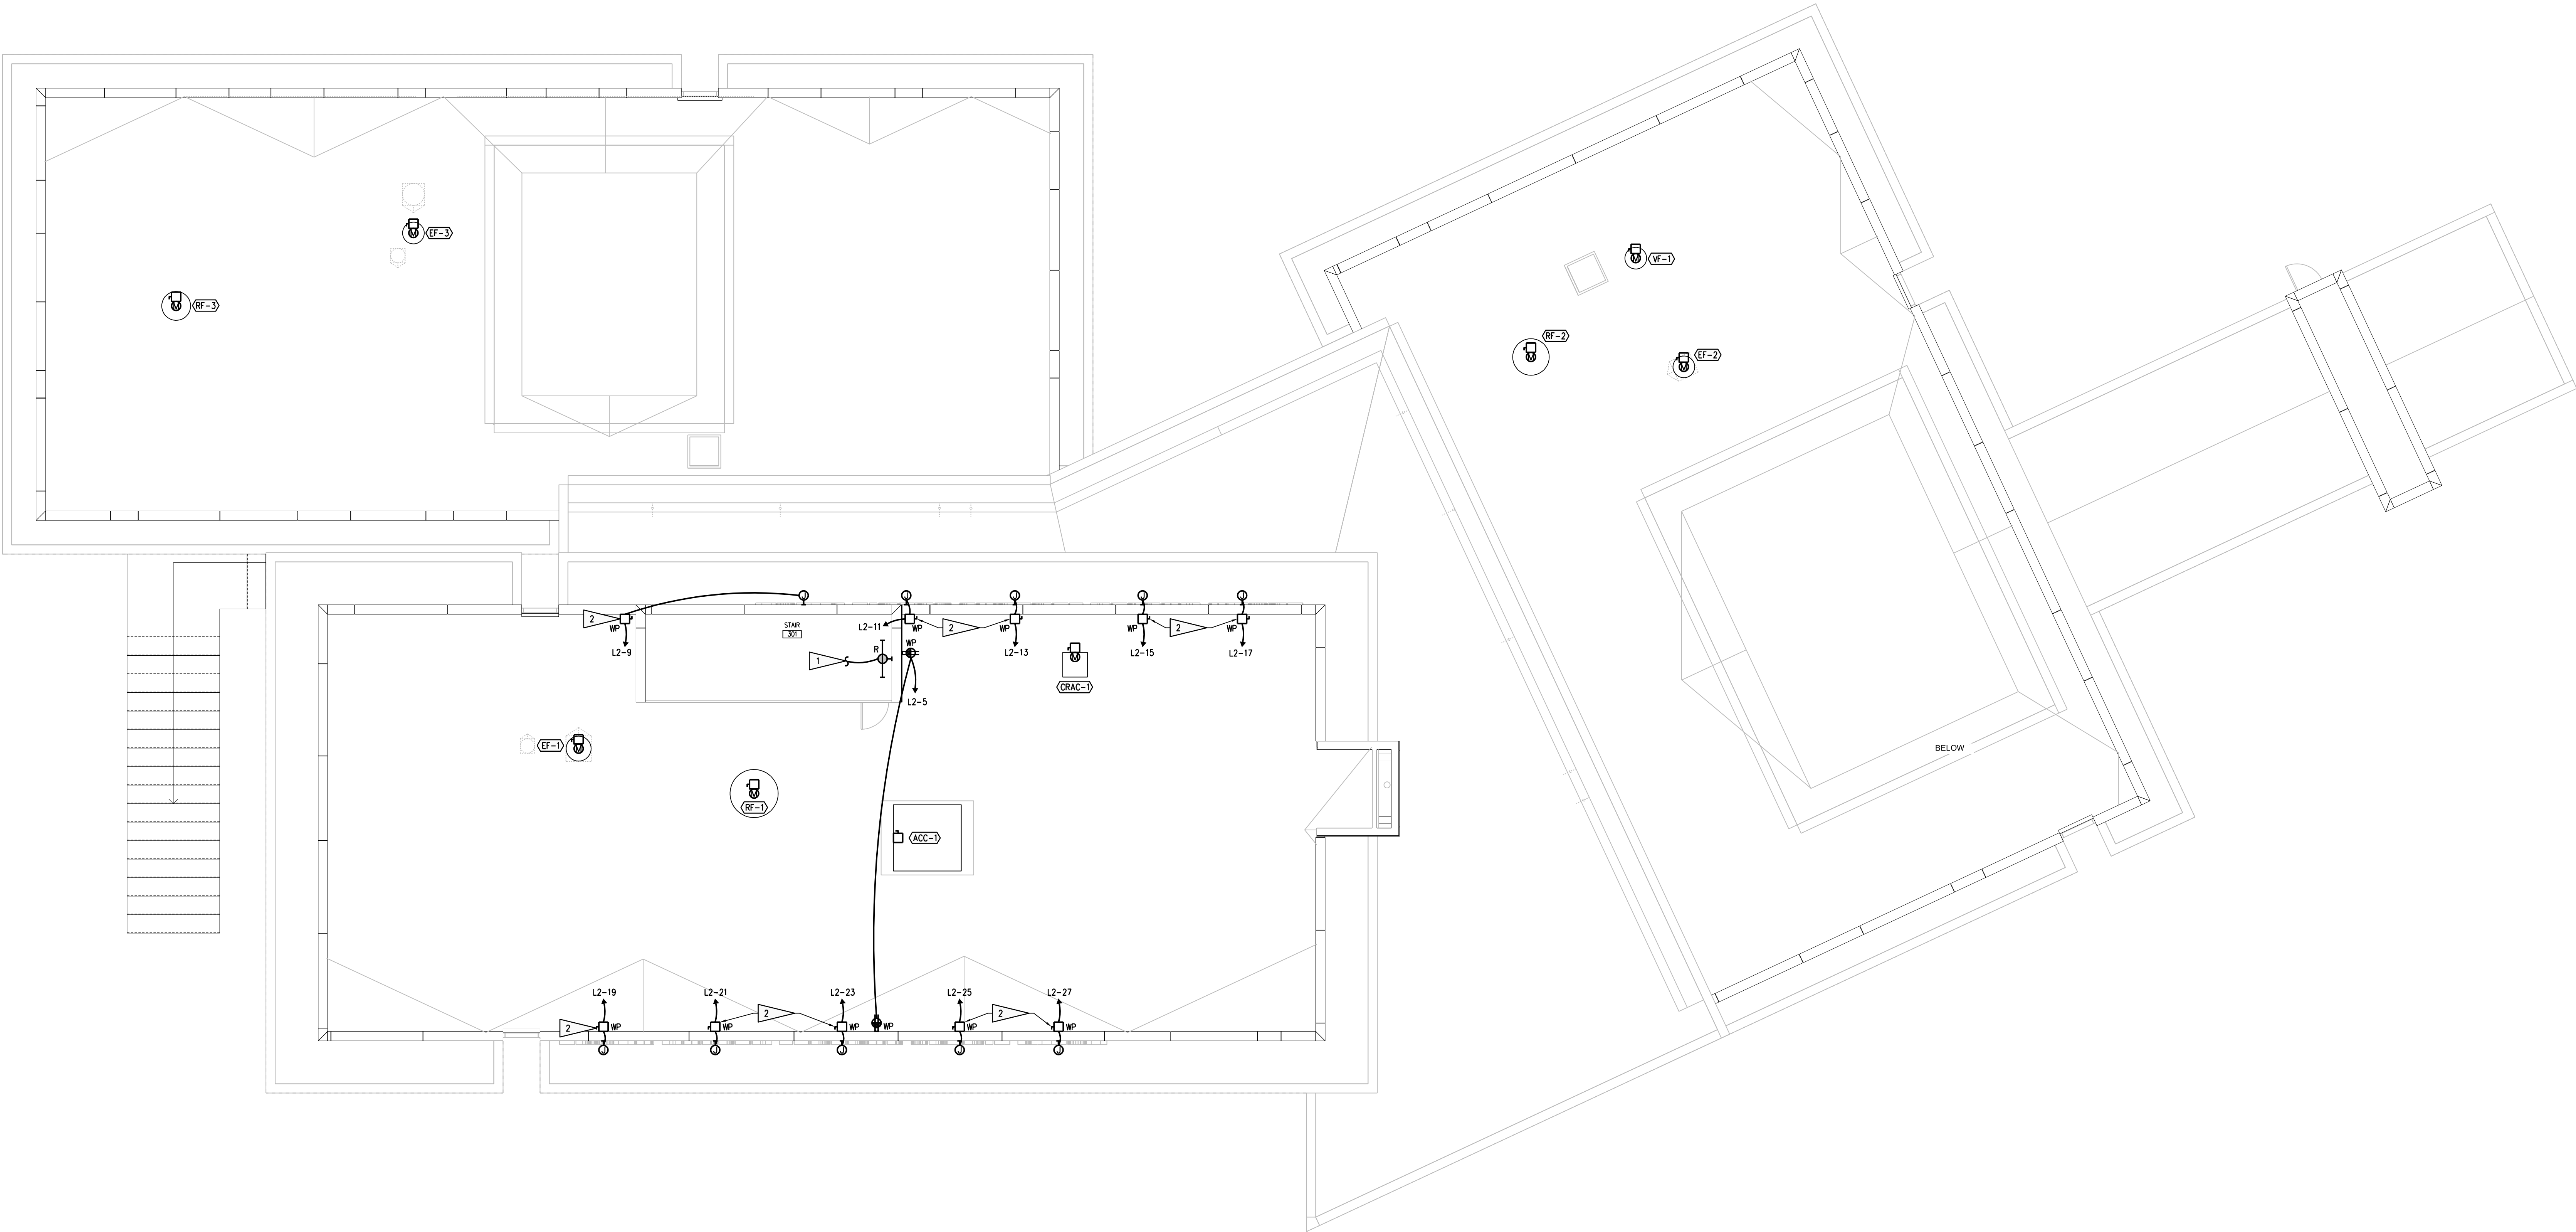

FLAG NOTES	GENERAL NOTES
1. CONNECT TO STAIR LIGHTING OF FLOORS BELOW. 2. PROVIDE DISCONNECT AT BUILDING SIGN PER NEC 600.6. VERIFY LOCATION OF SIGN WITH ARCHITECT PRIOR TO INSTALLATION. VERIFY SIGN CONNECTION REQUIREMENTS WITH SIGN MANUFACTURER. CONNECT CIRCUIT SHOWN VIA EXTERIOR SIGN LIGHTING TIME CLOCK ON 2ND LEVEL.	1. SEE SPECIFICATIONS FOR MATERIALS AND METHODS. 2. ELECTRICAL INSTALLATIONS SHALL COMPLY WITH CURRENT ADOPTED NEC, STATE AND LOCAL CODES. 3. INSTALL EQUIPMENT GROUNDING CONDUCTORS IN ALL CONDUITS. 4. CONTRACTORS ARE TO EXAMINE THE SITE AND DOCUMENTS OF OTHER TRADES, AND BECOME FAMILIAR WITH THE FULL SCOPE OF WORK. 5. ALL PENETRATIONS FOR RACEWAY AND WIRE WHICH ARE FURNISHED AND INSTALLED BY THE EC, THAT PENETRATE FLOORS, FIRE AND/OR SMOKE WALLS, AND FULL HEIGHT PARTITIONS (INCLUDING CHASE WALLS) SHALL BE SEALED WITH A SYSTEM SPECIFICALLY UL APPROVED FOR THE APPLICATION, TO MAINTAIN FIRE RATING. 6. FOR TEMPERATURE CONTROL EQUIPMENT, ALL POWER WIRING 120V AND ABOVE BY EC, LESS THAN 120V ROUGH-IN BY EC, LOW VOLTAGE POWER AND CONTROL WIRING BY MC. COORDINATE ALL HVAC POWER/CONTROL WIRING WITH MC.

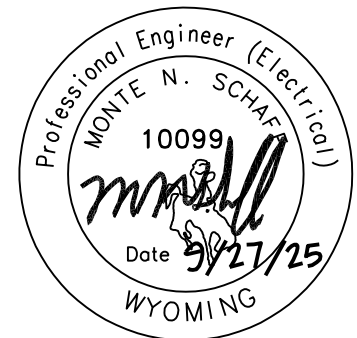

TRONA VALLEY FEDERAL CREDIT UNION
1700 GATEWAY BLVD
ROCK SPRINGS, WYOMING 82901

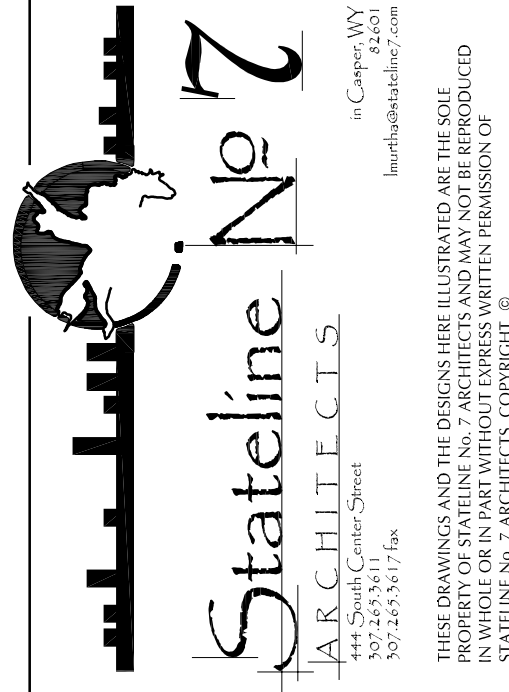

PROJECT NUMBER
23-018 / 24112

DATE
09-27-2025

DRAWN BY
KN

DISK ID.
N/A

SHEET TITLE
ROOF LEVEL
ELECTRICAL
PLAN

SHEET NUMBER

16.34