


GENERAL DEMOLITION NOTES

- A. SITE AREA SHOWN IN GREEN ONLY IS OPEN TO USE FOR STAGING.
B. MAINTAIN ACCESS TO THE BUILDING AND SOME PARKING AREAS AT ALL TIMES
C. CONTRACTOR IS RESPONSIBLE FOR CLEARING THE SITE OF MISCELLANEOUS WASTE AND MATERIAL UPON COMMENCEMENT OF CONSTRUCTION ACTIVITIES. IT IS NOT EXPECTED THAT ANY SIGNIFICANT MATERIAL WILL NEED TO BE REMOVED FROM THE SITE THAT IS NOT LISTED BELOW, BUT CONTRACTOR SHALL VERIFY THESE CONDITIONS TO HIS SATISFACTION.
D. ALL DEMOLISHED MATERIALS SHALL BECOME THE PROPERTY OF THE CONTRACTOR UNLESS OTHERWISE DESIGNATED.
E. ALL PAVEMENT, BASE COURSE, SIDEWALKS, CURBS, FOUNDATIONS, ETC. IN THE AREA TO BE REMOVED SHALL BE REMOVED TO FULL DEPTH.
F. THE CONTRACTOR SHALL USE WATER SPRINKLING AND OTHER SUITABLE METHODS AS NECESSARY TO CONTROL DUST AND DIRT CAUSED BY THE DEMOLITION WORK.
G. CONTRACTOR SHALL PROVIDE PROTECTION TO ALL STREETS, FENCES, TREES, UTILITIES AND STRUCTURES THAT ARE TO REMAIN. REPAIR CONTRACTOR-CAUSED DAMAGE AT NO ADDITIONAL COST TO THE OWNER.
H. ANY CAVITIES LEFT BY STRUCTURE / TREE / STUMP REMOVAL SHALL BE BACK FILLED AND COMPACTED.
I. CONTRACTOR SHALL LOCATE AND MARK ALL EXISTING UTILITIES PRIOR TO COMMENCING THE WORK. MAINTAIN MARKING DURING CONSTRUCTION AS MUCH AS FEASIBLE.

DEMOLITION LEGEND


SYMBOL	DESCRIPTION
	EXISTING CONCRETE TO BE DEMOLISHED
	PROTECT ROCK OUTCROPPINGS
	CONSTRUCTION AREA - BOULDERS WITHIN BOUNDARY TO BE COLLECTED AND STOCK PILED IN SPECIFIED LOCATION FOR USE ON SITE - FENCE AREA WITH CONSTRUCTION FENCE
	GENERAL STOCKPILE LOCATION
	STOCKPILE LOCATION FOR DECONSTRUCTED ROCK OUT CROPPING BOULDERS
	PROTECTION AREAS NOT TO BE DISTURBED BY CONSTRUCTION WORK
	TRACKING PAD AT CONSTRUCTION ENTRY

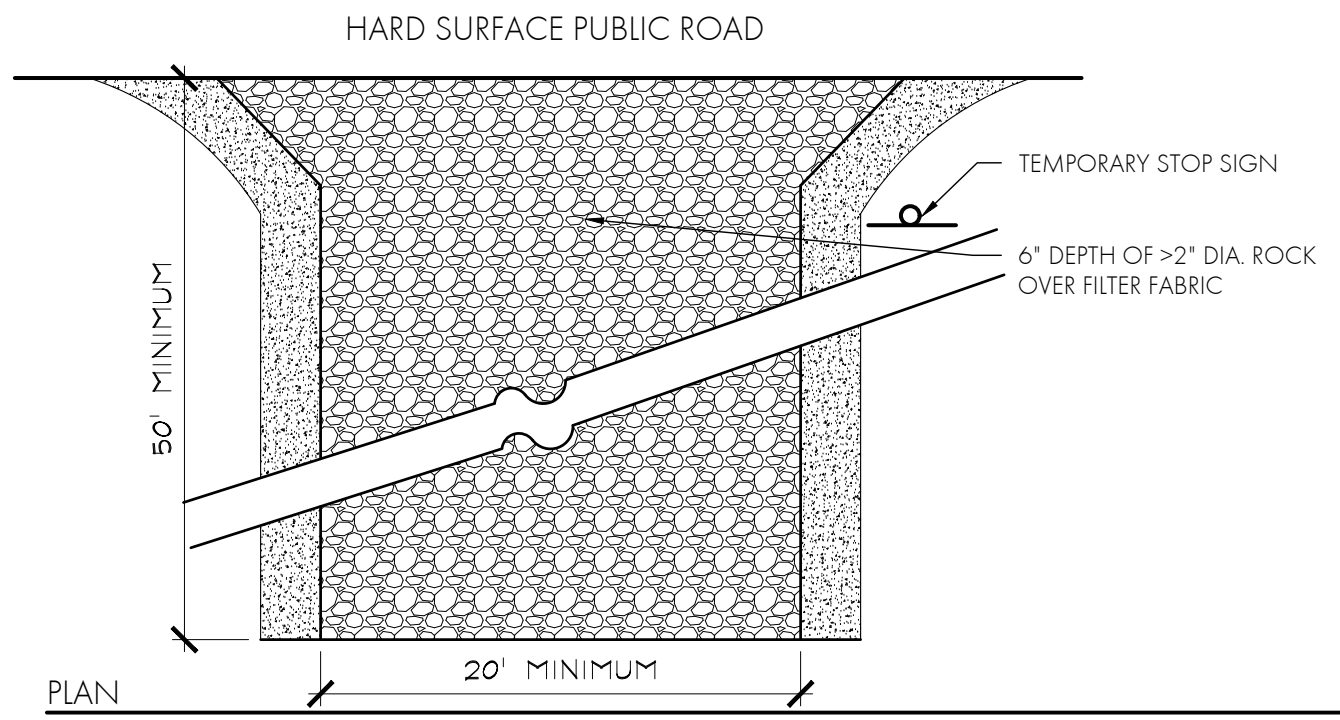


1 VEHICLE TRACKING CONTROL

NTS

DEMO AND SITE RECOVERY PLAN



TRONA VALLEY FEDERAL CREDIT UNION
1700 GATEWAY BLVD
ROCK SPRINGS, WYOMING 82901

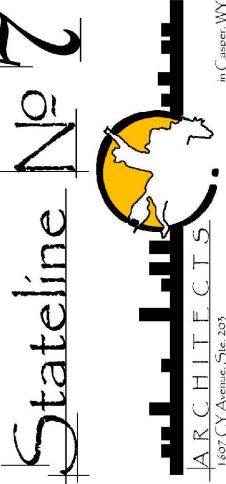

PROJECT NUMBER
23-018

DATE
09-27-2025

DRAWN BY
MATT FRIDELL

DISK ID.

SHEET TITLE
DEMO &
RECOVERY
PLAN

SHEET NUMBER

L101