

ACCESSORIES LEGEND

SCALE: 3/8" = 1'-0"

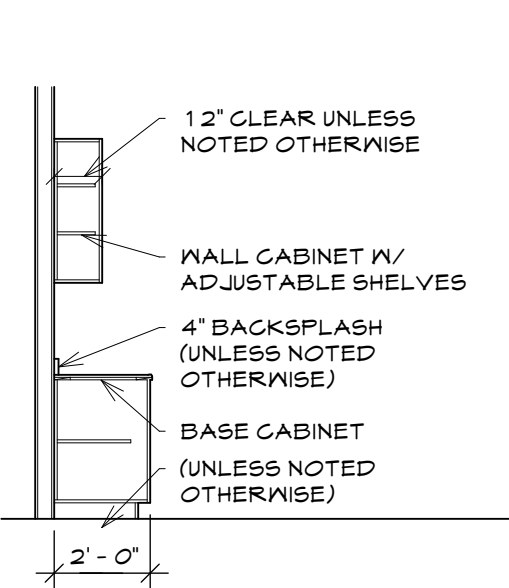


Diagram illustrating the components of a cabinet door assembly:

- ADJUSTABLE SHELF (TYP)
- INDICATES DOOR SWING (TYP)
- PLASTIC LAMINATE FINISHED END PANEL, ALL EXPOSED SURFACES TO BE LAMINATED
- SIDESPLASH RETURN (TYP) @ CORNER CONDITIONS
- SEALANT @ BACK SPLASH
- ADJUSTABLE SHELVES (TYP)
- HIDDEN EDGE ROLLS (TYP)
- WHEN SHOWN PROVIDE LOCK ON CASE/DOOR OR DRAWER
- FD

FD REPRESENTS THAT IT IS TO BE SIZED AS A FILE DRAWER

Diagram illustrating the installation of plastic laminate on a cabinet top. The diagram shows a cross-section of the cabinet top and the laminate. Key components and dimensions are labeled:

- SCRIBE TO WALL (TYP)
- BACKSPLASH (TYP)
- PLASTIC LAMINATE SELF-EDGED
- BASE CABINET OR SKIRT @ DROP-IN SINK LOCATIONS WITHOUT BASE CABINETS
- Dimensions: 1/4", 1/4", 1/4", 4", 1/2", 3/4", and 2'-0" (UNLESS NOTED OTHERWISE)

ADJUST LOCATION OF DIAGONAL TO MOVE WITH LENGTH OF TOP BRACKET

LENGTH OF TOP BRACKET SHALL BE 6" LESS THAN CENTER TO NATH GENERAL CONTRACTOR TO COORDINATE WIDTHS REQUIRED.

1" SQUARE STEEL TUBING PAINT TO MATCH WALL PRIOR TO INSTALLATION

COORDINATE BLOCKING ATTACHMENT

FINISH FLOOR

3/8" DRILL HOLE CENTERED (TYP.)

CLOSED END W/ EDGES DRILL SMOOTH.

CONTRACTOR HAS THE OPTION OF USING EITHER THE "D" BRACKET OR THE "E" BRACKET

2'-0"

9 1/2"

1'-6"

9 1/2"

VARIABLES

LENGTH OF TOP BRACKET SHALL BE 6" LESS THAN THE COUNTER TOP WIDTH. GENERAL CONTRACTOR TO COORDINATE WIDTHS REQUIRED.

1' 1/2"

4MM HARDWARE INC. WORK STATION BRACKET
400 N. GRAMBY STREET MANHEIM, PA 17545
1-888-647-0200
WWW.4MMHARDWARE.COM

PRIMED FOR FIELD PAINTING TO MATCH COLOR OF WALL

PROFILE

FRONT VIEW

NOTE: ANOTHER APPROVED ALTERNATE BRACKET

[illegible]

Diagram illustrating the dimensions and components of a base cabinet:

- BACKSLASH, SEE INTERIOR ELEVATIONS**: Points to the upper section of the cabinet.
- SOLID SURFACE, BUILT-UP**: Points to the countertop area.
- BASE CABINET**: Points to the main body of the cabinet.
- 2" - 0"**: Dimension for the width of the base cabinet.
- 1/2"**: Dimension for the thickness of the countertop.
- 3/4"**: Dimension for the height of the base cabinet.
- NOTE: SEE INTERIOR ELEVATION FOR BACKSLASH AND EASED EDGES**: Instruction for further details.

Technical drawing of a square hole in a plate. The hole is labeled $O' - q''$. The distance from the hole to the left edge is labeled EQ . The distance from the hole to the right edge is labeled EQ . The right edge is labeled $AMER$, $TRAS$, $MODE$, and $FINISH$.

Diagram illustrating the dimensions for a Granite Built-Up Top:

- Top thickness: 1 1/2"
- Top width: 2'-0" (UNLESS NOTED OTHERWISE)
- Base cabinet height: 3/4"

SOLID SURFACE COUNTERTOP, TYP. PROVIDE EASED OUTSIDE EDGES

2'-1"

OPENING FOR SINK

1'-0"

1'-0"

2X4 FRAMING

(10) #8 X 1 1/2 SCREWS

1/4" STEEL PLATE AT OPEN END(S) OF COUNTERTOP

(12) #12 TEBS

HATCHED AREA REPRESENTS MINIMUM SPACE SINK AND COUNTER CAN OCCUPY TO MEET ADA CLEAR SPACE

(2) 6" X 1-5/8" X 16 GA. STUDS AT COUNTER BRACKET

6"

9.25"

6" X 1-5/8" X 16 GA. STEEL STUDS

1/4" STEEL PLATE

#10 TEKs

1/8"

9.25